

GRYFFIN CORROMESH 358

High Security Mesh



GRYFFIN
HIGH SECURITY FENCING & GATES
Smarter solutions, guaranteed.

Design

Horizontal corrugations give Corromesh 358 a contemporary, stylish, and distinctive appearance whilst providing maximum strength. Corromesh 358 sheets can be stepped evenly over uneven landscapes and easily retrofitted to any style of post and/or structure.

Quality & Testing

Corromesh 358 mesh is guaranteed to meet the specific standards for raw materials and coatings. The weld manufacturing process has a quality plan utilising stringent quality control procedures. Mesh sheets weld tested to 65% to minimum wire strength.

Performance & Durability

Unique tensile properties make Corromesh 358 several times harder to penetrate than other high security fences.

Finishes

Zinc/Alloy is a high anti-corrosive surface finish applied to a 4mm and 3.15mm medium tensile wire. In external atmospheric conditions, a zinc/5% aluminium coating offers two to four times greater protection per unit coating than regular galvanised products.

Specifications


| Sheet Size W/H | No. Per Pack | Kg Per Sheet | Stock | Packaging | Finish | Weight Per Pack |
|-----------------|--------------|--------------|-------|-----------|------------------|-----------------|
| 2404mm x 1800mm | 40 | 31.65kg | Yes | Pallet | Zalcote/Lifemax+ | 1290kg |
| 2404mm x 2100mm | 30 | 36.13kg | Yes | Pallet | Zalcote/Lifemax+ | 1110kg |
| 2404mm x 2384mm | 30 | 40.27kg | Yes | Pallet | Zalcote/Lifemax+ | 1230kg |
| 2404mm x 2700mm | 20 | 46.65kg | MTO | Pallet | Zalcote/Lifemax+ | 960kg |
| 2404mm x 3000mm | 20 | 51.84kg | Yes | Pallet | Zalcote/Lifemax+ | 1060kg |

Recommended Fixings

Recommended fastening for Corromesh 358 to CHS, RHS or SHS member via 35mm self-drilling screws or 25/50mm tamper proof self-drilling security screws. Recommended fixing through 'Corromesh safety channel', providing a safer finish and more economical installation.

Appropriate Standards

Corromesh 358 4mm and 3.15mm diameter wire is procured via AS/NZS 4534-2006. The manufacturing standard within the ASF Quality Plan is EN 10223.4-2012 for high security applications as AS 2423-2006 for general mesh usage.

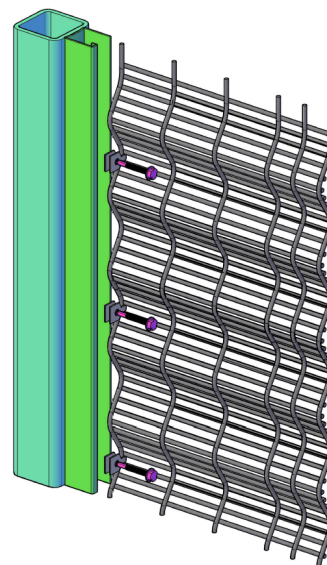

SCEC ENDORSED PRODUCT