
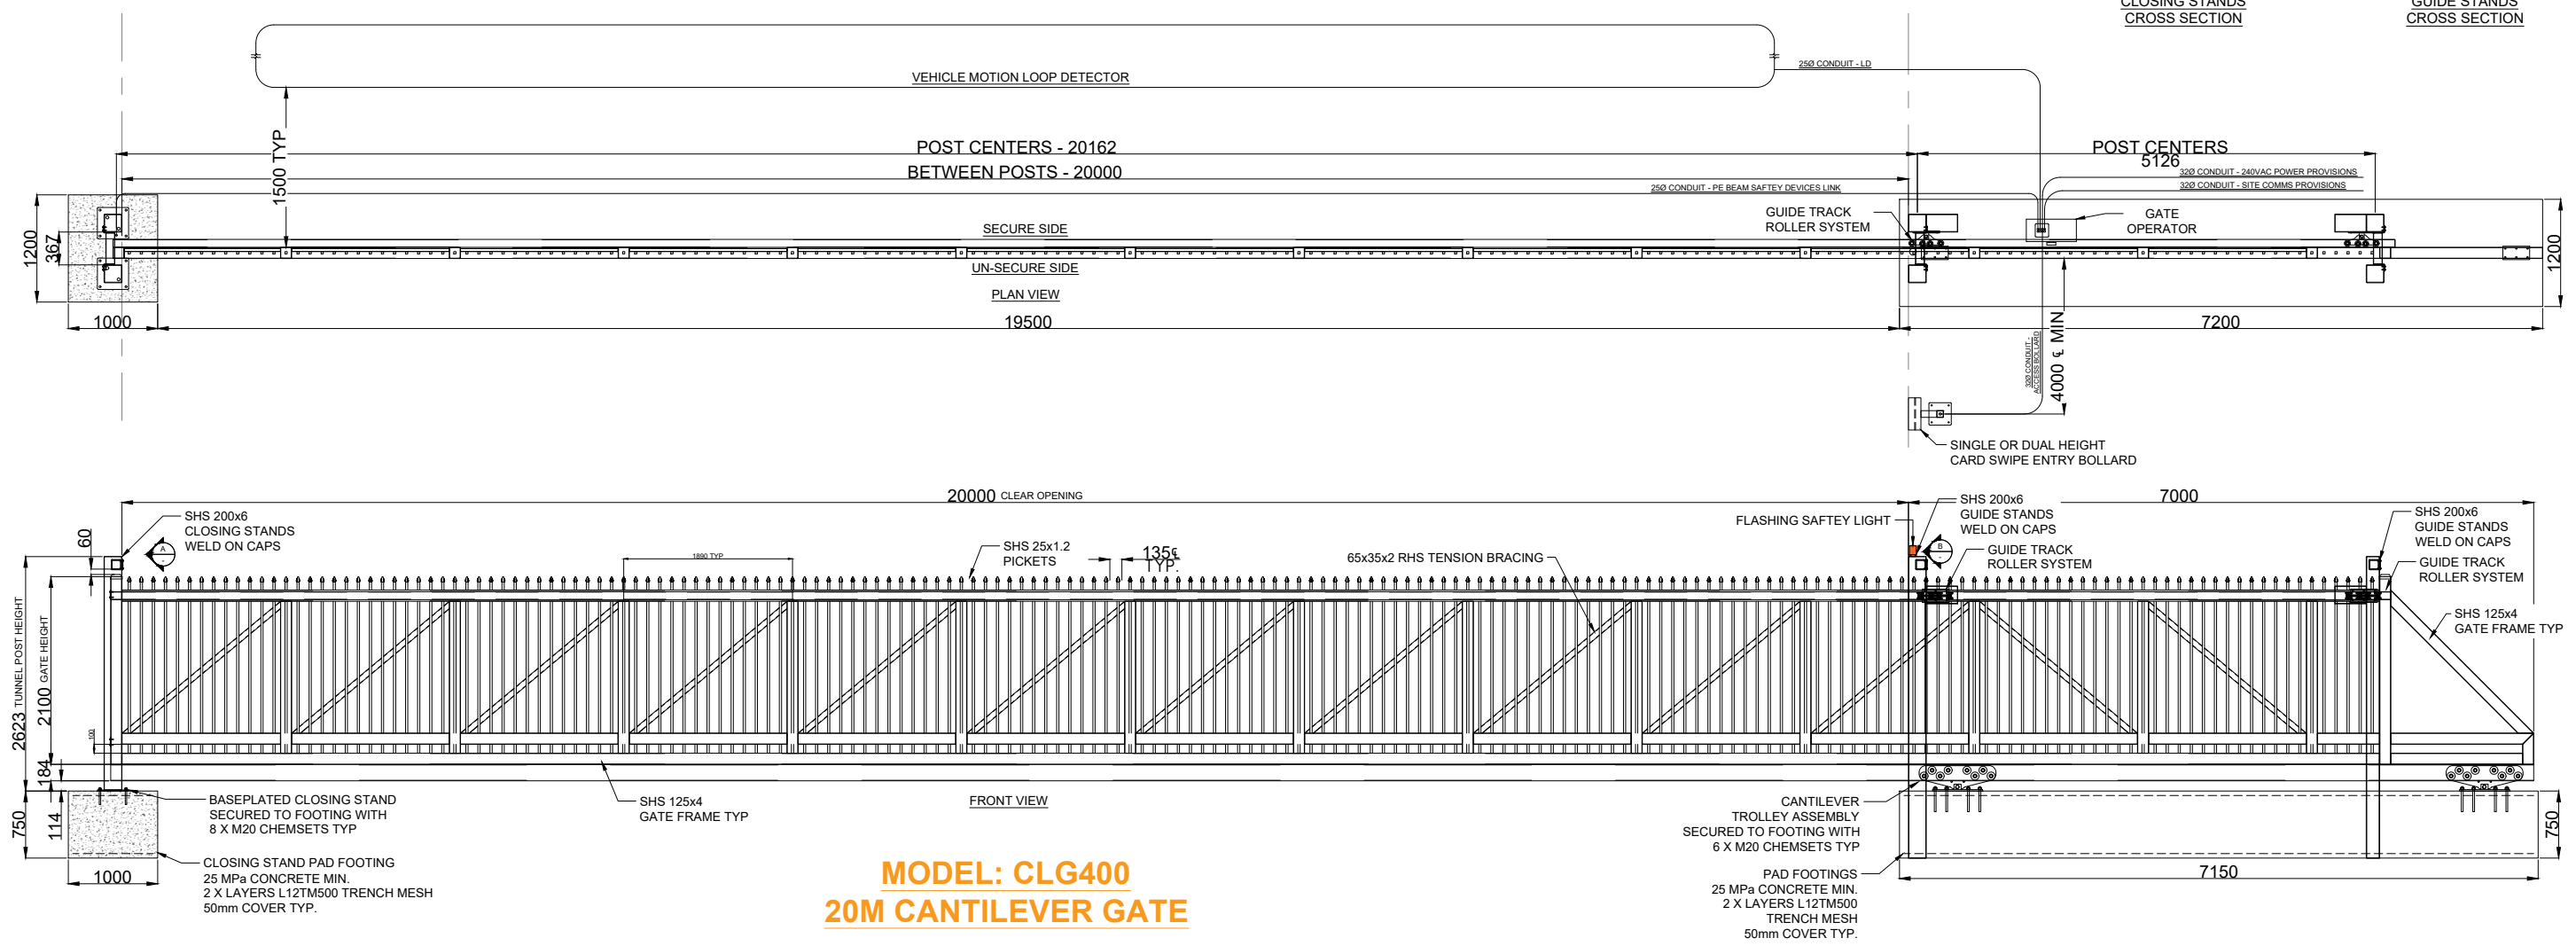


**CLG400 - CANTILEVER GATE  
CONFIGURATION OPTIONS**

- 16 - 25M Clear Opening Width
- 1.8 - 2.4 Standard Gate Heights
- Standard Gate infill options
  - 25SHS Pickets @115 or 135mm (Shown) Centres
  - 358 Anti-Climb WeldMesh
  - 358 Corromesh WeldMesh
- Optional safety features shown, available at request

**NOTE:**

- Gate and Footings to be Engineered as per site requirements
- 49 Metres total length required for Gate installation and Operation (20m Configuration)

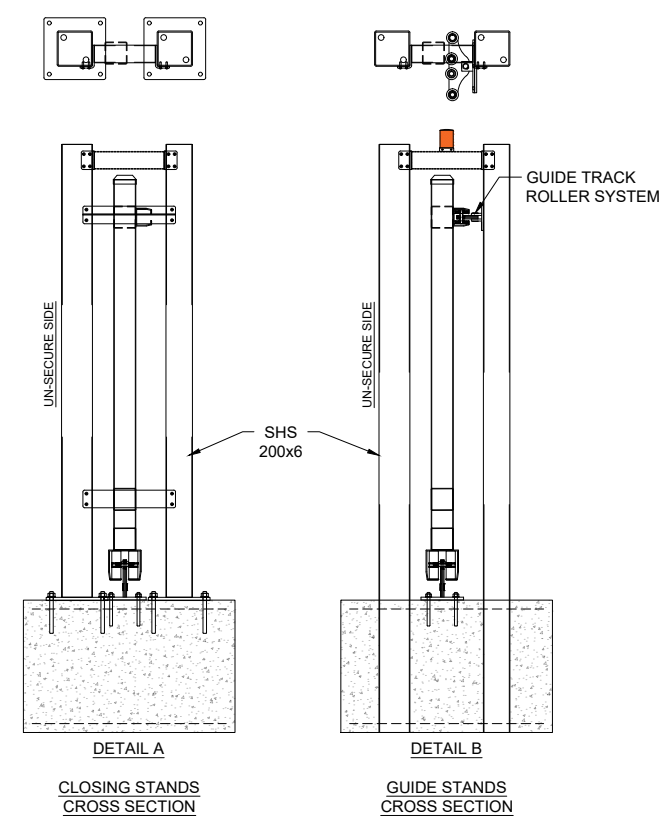

**MODEL: CLG400  
20M CANTILEVER GATE**

This drawing includes the principles of design and is submitted by **GRYFFIN PTY LTD** with the agreement that it not to be reproduced, copied or loaned in part or whole. It is not to be used in any manner that may constitute a detriment directly or indirectly to **GRYFFIN PTY LTD**. Acceptance of this drawing will be constructed as an agreement to the above.

**GRYFFIN PTY LTD**  
8 Bessemer Road  
Bayswater, Victoria - 3153  
Telephone: (03) 8720 9400  
Email: sales@gryffin.com.au

Dwg No: <b>GRYFFIN-CLG400</b>		
Drawn: <b>JG</b>	Checked: <b>AP</b>	Approved: <b>AP</b>
Date: <b>25/09/2024</b>	Scale: <b>NTS</b>	



FINISH PC BLACK
Sheet: <b>1</b>
Rev: <b>A</b>